


Brackish Water RO Elements


TMHA

Type	Diameter Inch	Membrane Area ft ² (m ²)	Salt Rejection %	Product Flow Rate gpd(m ³ / d)	Feed Spacer Thickness mil
TMH10A	4"	87(8)	99.3	2,400(9.1)	31
TMH20A-370	8"	370(34)	99.3	10,200(38.6)	34
TMH20A-400	8"	400(37)	99.3	11,000(41.6)	28
TMH20A-430	8"	430(40)	99.3	11,800(44.7)	28
TMH20A-440	8"	440(41)	99.3	12,100(45.7)	28
1. Membrane Type			Cross Linked Fully Aromatic Polyamide Composite		
2. Test Conditions			Feed Water Pressure 100 psi(0.69MPa) Feed Water Temperature 77 ° F(25°Q) Feed Water Concentration 500 mg/l Nacl Recovery Rate 15% Feed Water pH 7		
3. Minimum Salt Rejection			99.0%		
4. Minimum Product Flow Rate			1,900gpd(7.2m ³ /d)(TMH10A) 8,200gpd(30.9m ³ /d)(TMH20A-370) 8,800gpd(33.3m ³ /d)(TMH20A-400) 9,500gpd(35.9m ³ /d)(TMH20A-430) 9,700gpd(36.7m ³ /d)(TMH20A-440)		

Dimensions

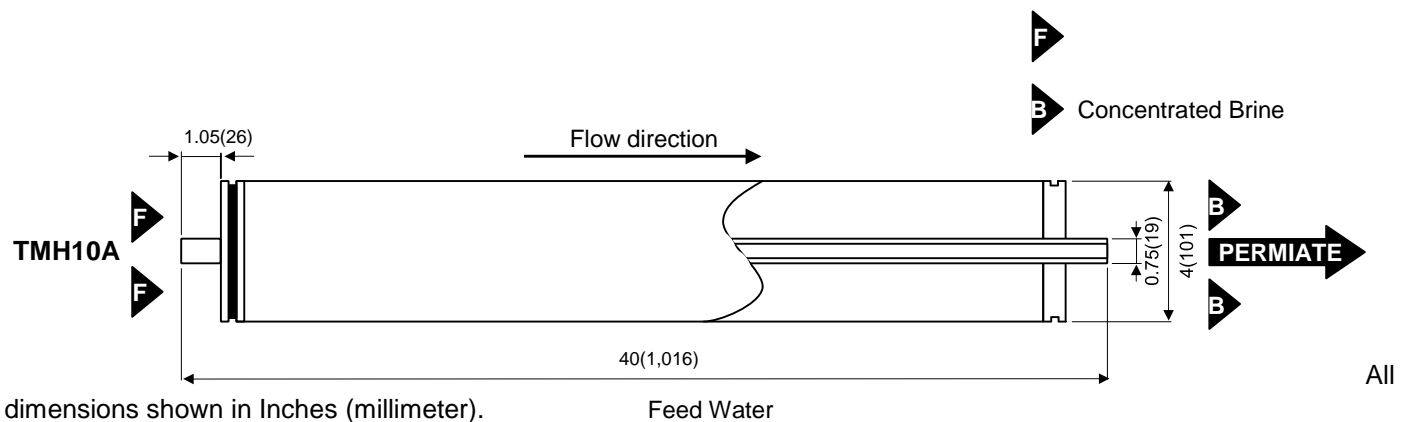

All

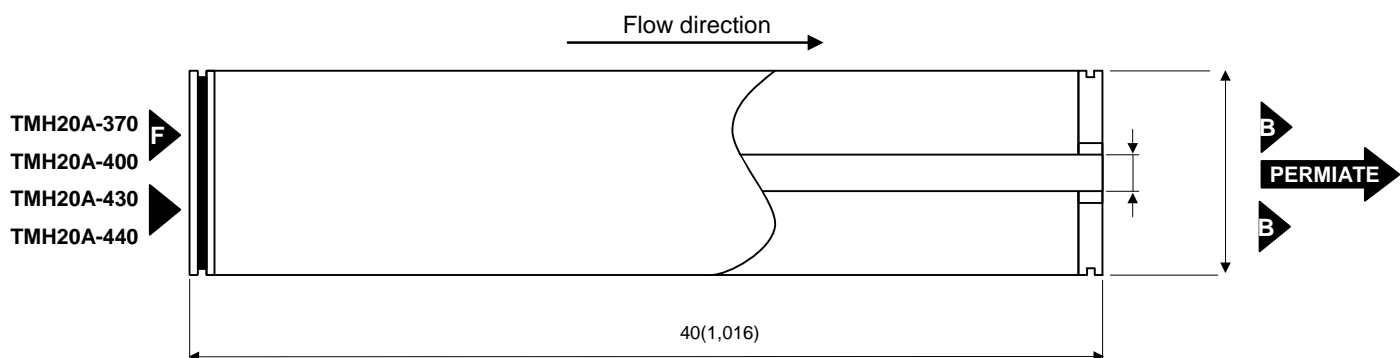

Operating Limits

Maximum Operating Pressure	365psi (2.5 MPa)
Maximum Feed Water Temperature	113 ° F (45o)
Maximum Feed Water SDI ₁₅	5
Feed Water Chlorine Concentration	Not Detactable
Feed Water pH Range, Continuous Operation	2-11
Feed Water pH Range, Chemical Cleaning	1-12
Maximum Pressure Drop per Element	20psi (0.14 MPa)
Maximum Pressure Drop per Vessel	60psi (0.4 MPa)

Operating Information

1. For the recommended design range, please consult the latest Toray technical bulletin, design guide lines, computer design program, and/ or call an application specialist. If the operating limits given in this Product Information Bulletin are not strictly followed, the Limited Warranty will be null and void.
2. All elements are wet tested, treated with a 1% by weight percent sodium bisulfite storage solution, and then vacuum packed in oxygen barrier bags, or treated with tested feed water solution, and then vacuum packed in oxygen barrier bags with deoxidant inside. To prevent biological growth during short term storage, shipment, or system shutdown, it is recommended that Toray elements be immersed in a protective solution containing 500 - 1,000 ppm of sodium bisulfite (food grade) dissolved in permeate.
3. Permeate from the first hour of operation shall be discarded.
4. The customer is fully responsible for the effects of chemicals that are incompatible with the elements. Their use will void the element Limited Warranty.